



2016 in white



2016 in bronze with full view lites



2016 in brown with pass door

# COMMERCIAL 2000 SERIES

**2" Thick R-17.66**

2010 / 2012 / 2014 / 2016 / 2032 /  
2033 / 2032-20 / 2033-20 / 2050 /  
2051 / 2060 / 2061 / 2063 / 2064 /  
2070 / 2071 / 2072 / 2073 / 2074 /  
2080 / 2081 / 2082 / 2090



## 2000

### The Strength To Keep Out Noise and Weather

Haas 2000 Series commercial insulated steel doors are manufactured with the elements in mind. They will enhance the beauty of your building while insulating and dampening outside noise at the same time. Choosing high R-Value sectional doors will help increase energy efficiency and savings.

Polyurethane insulation provides the highest R-Values available in sectional steel doors.

2000 series doors are reinforced with roll-formed galvanized steel struts and double-end hinges, as required to meet wind load specifications and to comply with ANSI/DASMA 102-2004.

The protective coating system is found on both the interior and exterior steel.

HAAS  
INSULATION






2032 in white with large TL lites

2000 QUICK GUIDE


Model	Door Thickness	R-Value*	Max. Door Size		End Style Type	Section Skins	
			Width	Height		Inside	Outside
2010	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
2012	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
2014	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
2016	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
2032	2" (50.8mm)	17.66	24'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA Flush Smooth Steel
2033	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA V-Groove Smooth Steel
2032-20	2" (50.8mm)	17.66	24'-2"	32'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA Flush Smooth Steel
2033-20	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA V-Groove Smooth Steel
2050	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum
2051	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum
2060, 2072, 2082	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel
2061, 2071, 2081	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel
2063, 2073	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel
2064, 2074	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Woodgrain Steel
2070	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel
2080	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Raised Panel Woodgrain Steel
2090	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel

\*calculated R-Value


Note: Certain weights and/or applications may limit the size allowed



**Flush Woodgrain**  
All Colors  
**Model 2010** Window Options: p 28-30  
**Model 2014** Window Options: p 30

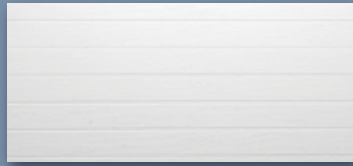


**V-Groove Woodgrain**  
All Colors  
**Model 2012** Window Options: p 30  
**Model 2016** Window Options: p 30

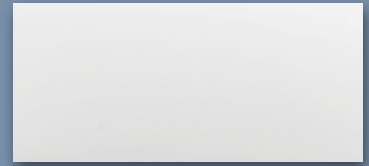


**Flush Smooth**  
Polar White and Brown  
**Model 2032** Window Options: p 30  
**Model 2032-20** Window Options: p 30



**V-Groove Smooth**  
Polar White and Brown  
**Model 2033** Window Options: p 32  
**Model 2033-20** Window Options: p 32

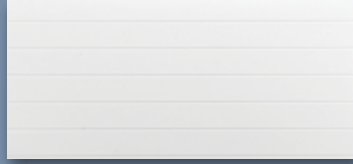


**V-Groove Stucco Aluminum**  
Trinar® Polar White and Trinar® Almond  
**Model 2050** Window Options: p 32

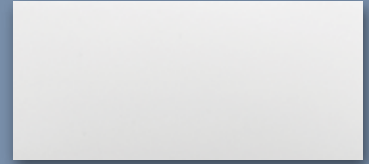


**Flush Stucco Aluminum**  
Trinar® Polar White and Trinar® Almond  
**Model 2051** Window Options: p 30




**Ribbed Short Woodgrain Panel**  
All Colors  
**Model 2060** Window Options: p 29  
**Model 2072** Window Options: p 30  
**Model 2082** Window Options: p 28

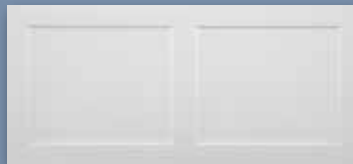


**Recessed Short Woodgrain Panel**  
All Colors  
**Model 2061** Window Options: p 29  
**Model 2071** Window Options: p 30  
**Model 2081** Window Options: p 28

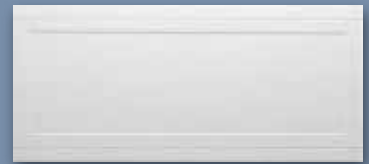

**Recessed Long Woodgrain Panel**  
All Colors  
**Model 2063** Window Options: p 29  
**Model 2073** Window Options: p 30



**Ribbed Long Woodgrain Panel**  
All Colors  
**Model 2064** Window Options: p 29  
**Model 2074** Window Options: p 30

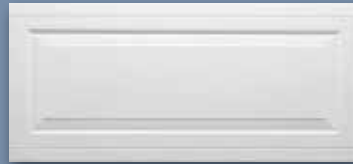

**Ranch Woodgrain Panel**  
All Colors  
**Model 2070** Window Options: p 30




**Raised Standard Woodgrain Panel**  
All Colors  
**Model 2080** Window Options: p 28



**Sculptured Raised Woodgrain Panel**  
All Colors  
**Model 2090** Window Options: p 28

A **Full Thermal Break** is used in the tongue-and-groove construction of all 2000 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.



2000 series doors include **Air Infiltration Seals**, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.

**2000 Series Available Options**

- 2" or 3" Track
- Double Steel End Stiles
- Exhaust Port
- Cam Safety Device
- Spring Bumpers
- Chain Hoist
- High Cycle Springs
- Wind Load Rating
- Glazing (lites)
- High Cycle Rollers
- Aluminum Full View Section
- Pass Door
- Keyed Lock
- \*ASTM E 84 Fire Rated
- \*(No Air Filtration Seal on Fire Rated doors)

**Optional Exhaust Port (interior view)**



**Pass Door (interior view)**

