





610 in sahara tan

COMMERCIAL 600 SERIES

1³/₈" Thick **R-13.45**

610 / 612 / 614 / 616 / 632 /
632-20 / 633 / 633-20 / 660 / 661 /
663 / 664 / 670 / 671 / 672 / 673 /
674 / 680 / 681 / 682 / 690



600 Series / 1³/₈" thick / R-13.45

Strong, Efficient and Attractive

When your major considerations include energy efficiency, noise buffering and beauty, a Haas 600 Series commercial insulated steel door will far exceed your expectations. These CFC-free, polyurethane foam-injected steel doors offer exceptional benefits for commercial applications, including durable strength, unique paint system and hard working hardware to withstand the harshest of elements.

INSULATED



614 in charcoal



612 in white with small TL lites

600 QUICK GUIDE

Model	Door Thickness	R-Value*	Max. Door Size		End Style Type	Section Skins	
			Width	Height		Inside	Outside
610	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
612	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
614	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
616	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
632	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA Flush Smooth Steel
633	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA V-Groove Smooth Steel
632-20	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA Flush Smooth Steel
633-20	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA V-Groove Smooth Steel
660, 672, 682	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel
661, 671, 681	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel
663, 673	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel
664, 674	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Panel Woodgrain Steel
670	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel
680	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Raised Panel Woodgrain Steel
690	1-3/8" (34.9mm)	13.45	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel

*calculated R-Value

DOOR PANELS




Flush Woodgrain

All Colors

Model 610 Window Options: p 28-30

Model 614 Window Options: p 30

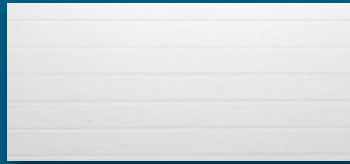


V-Groove Woodgrain

All Colors

Model 612 Window Options: p 30

Model 616 Window Options: p 30

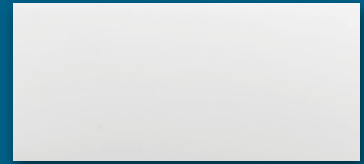


Flush Smooth

Polar White and Brown

Model 632 Window Options: p 30

Model 632-20 Window Options: p 30



V-Groove Smooth

Polar White and Brown

Model 633 Window Options: p 30

Model 633-20 Window Options: p 30



Ribbed Short Woodgrain Panel

All Colors

Model 660 Window Options: p 29

Model 672 Window Options: p 30

Model 682 Window Options: p 28




Recessed Short Woodgrain Panel

All Colors

Model 661 Window Options: p 29

Model 671 Window Options: p 30

Model 681 Window Options: p 28




Recessed Long Woodgrain Panel

All Colors

Model 663 Window Options: p 29

Model 673 Window Options: p 30

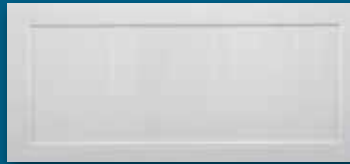

Ribbed Long Woodgrain Panel

All Colors

Model 664 Window Options: p 29

Model 674 Window Options: p 30



Ranch Woodgrain Panel

All Colors

Model 670 Window Options: p 30



Raised Standard Woodgrain Panel

All Colors

Model 680 Window Options: p 28



Sculptured Raised Woodgrain Panel

All Colors

Model 690 Window Options: p 28



OPTIONS

600 Series Available Options

- 2" or 3" Track
- Double Steel End Stiles
- Exhaust Port
- Cam Safety Device
- Spring Bumpers
- Chain Hoist
- High Cycle Springs
- Wind Load Rating
- Glazing (lites)
- High Cycle Rollers
- Keyed Lock
- ASTM E 84 Fire Rated

Optional Exhaust Port (interior view)



A **Full Thermal Break** is used in the tongue-and-groove construction of all 600 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.